



Filler Breather Caps

Extra Large-Bayonet Style Filler Strainer Breather

Model 57XL

- 250 GPM or 35 CFM
- Keeps Reservoir Fluids Clean, Protects and Prolongs Hydraulic System Life!
- Each unit packaged in kit with instructions and template for drilling mounting holes.
- Strainer lengths, screen mesh and materials can be varied to meet special needs.
- SAE J829 Mounting Flange



57XL-40



57XL-40N

(Photo illustrates foam elements)




BPC-57-XL-40



LC Option
Locking Cap



HN Option
High Neck

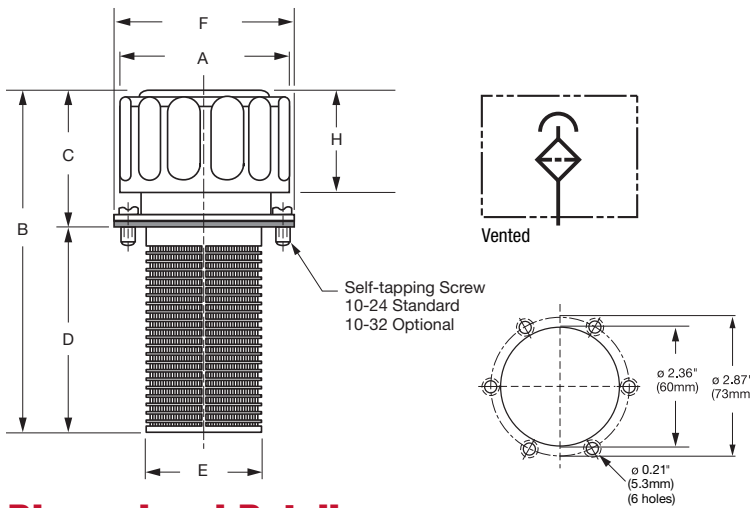

Dimensional Detail

MODEL NUMBER	MICRON	GPM	AIR FLOW	STANDARD								
				IN MM	A	B	C	D	E	F	G	H
57XL	3, 10, 40	250	35		3"	5.3"	2.2"	3.8"	1.9"	3.3"	3"	1.5"
					76	135	56	97	48	84	76	38

*G = 3" Stainless Steel Screen

Assembly Ordering Code

- 57-XL - 40 - N - *


Zinc/Sealer	Omit (Standard)
LC	Locking Cap
ISO	Hydraulic Fluid (Stamped In Cap)
AS	Anti-Splash
BPC	Black Powder (Coated Cap/Flange)

40	40 Micron
10	10 Micron
3	3 Micron

10-32	Self Tapping Screws
LCH	Less Chain
BUNA	Rubber Gasket
1.5 HN	1.5" High Neck
3 HN	3" High Neck
DIP	Specify Dipstick Length

Full, Add, Low, Marks Available
Custom Lengths available

Omit	3" 30 Mesh (Standard)
3-100	3" 100 Mesh
N	4" Nylon
6-30	6" 30 Mesh
6-100	6" 100 Mesh
8-30	8" 30 Mesh



Please supply drawing specifying lengths shown. Dipstick may be marked "FULL" and "ADD". Optional wording available.



DIP Option
Dipstick

Cap Only Ordering Code

- AS - 40 XL - LCH

Zinc/Sealer	Omit (Standard)
LC	Locking Cap
ISO	Hydraulic Fluid (Stamped In Cap)
AS	Anti-Splash
BPC	Black Powder (Coated Cap/Flange)

40XL	40 Micron
10XL	10 Micron
3XL	3 Micron

LCH	Less Chain
BUNA	Rubber Gasket
DIP	Specify Dipstick Length
OMIT	No Options



See website technical bulletin TB.TA11.708 for Anti Splash information.